
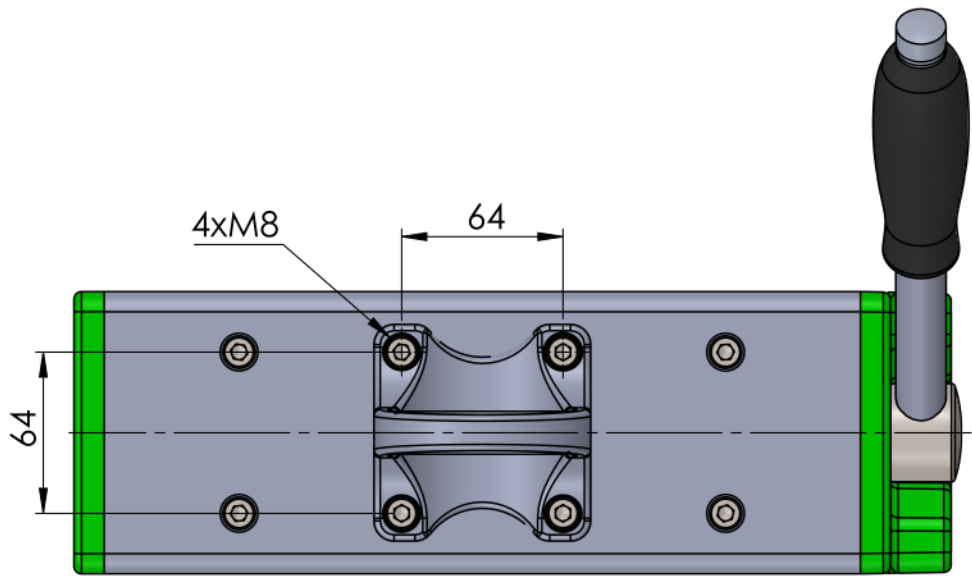
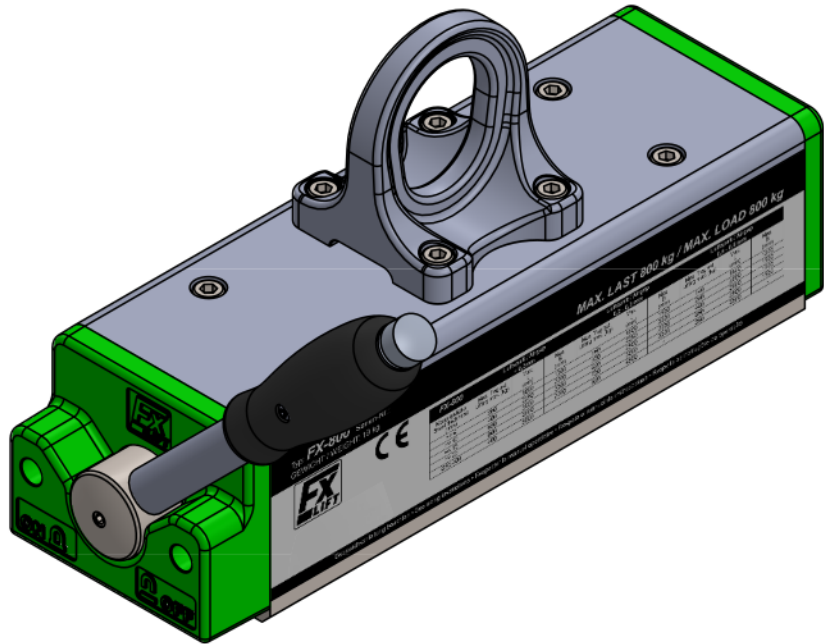
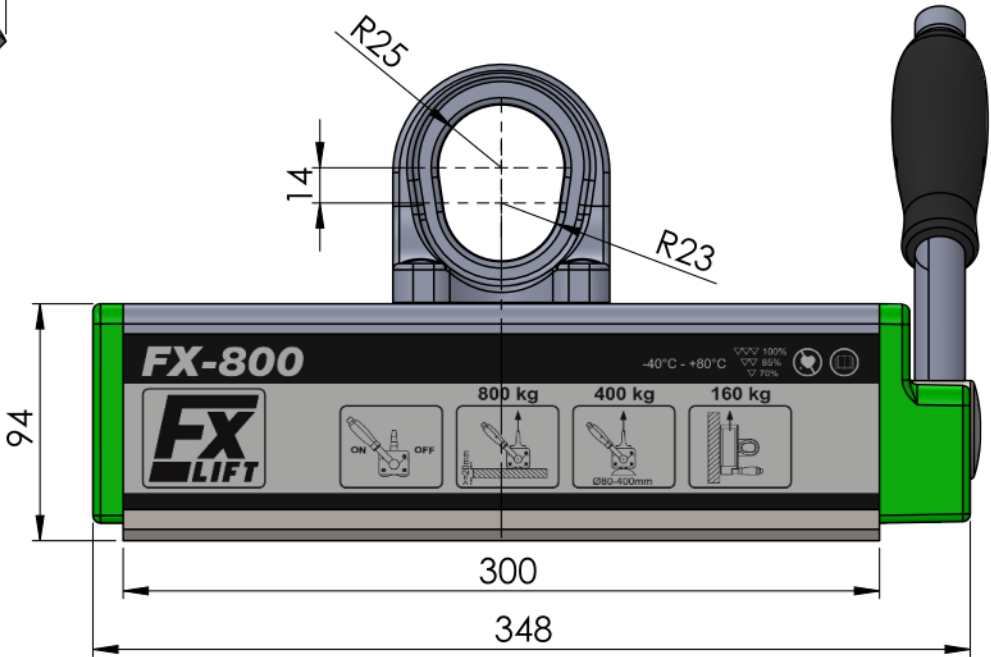
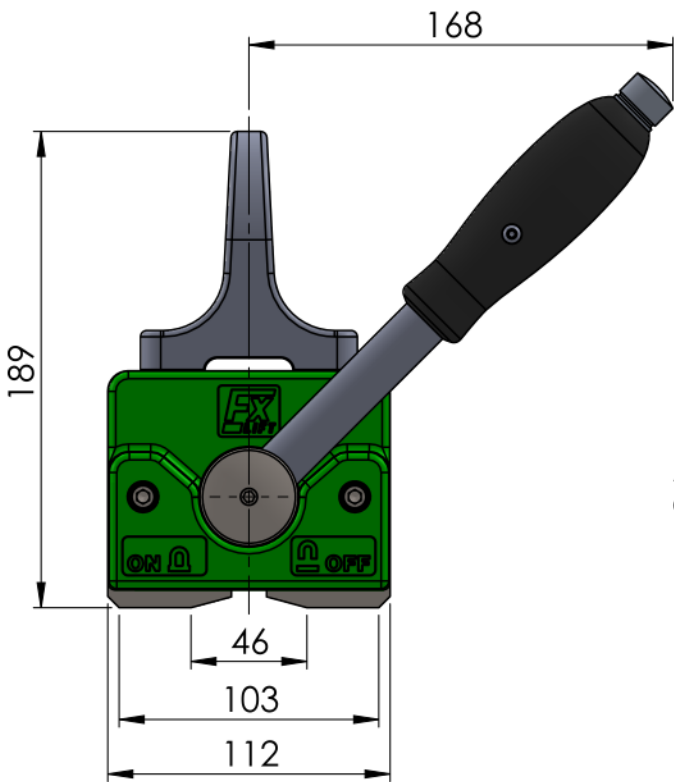


Working Load according to EN 13155	
load capacity on flat material:	800kg
load capacity Ø80-400:	400kg
Max. load capacity > 20mm material thickness	



FX800	Air gap <0,2mm			Air gap 0,2- 0,3mm			Air gap 0,3- 0,6mm			Schutzvermerk nach DIN ISO 16016 beachten! Nachdruck nur mit unserer Genehmigung! All rights reserved according to DIN ISO 16016! Reprint with our permission only!						tolerance	material:	weight: 22.00		
Material Thickness (mm)	Max. Load (kg)	Max. L (mm)	Max. B (mm)	Max. Load (kg)	Max. L (mm)	Max. B (mm)	Max. Load (kg)	Max. L (mm)	Max. B (mm)						ISO 7168 M	drawing no.;	0019533			
>=6	200	1800	1500	160	1800	1500	140	1500	1500								description: FX 800			
>=10	400	2250	2000	320	2250	2000	280	2000	1500											
>=15	650	2500	2000	520	2500	2000	450	2000	1500											
>=20	800	3000	2000	720	3000	2000	550	2500	1500											
Ø80-400	400	5000	-	320	4500	-	250	3500	-											
										rev.	change	date	name	 Ackerweg 9 - 9500 Vilach Austria - UID: ATU69320638 tel: +43(0) 4242 21174 - www.vegatechnik.com			part no.:		sheet 1 / 1	
																11010800		A3		
																scale: 1:3		Status: Freigegeben		