


Electromagnet series B

ELECTROMAGNETS

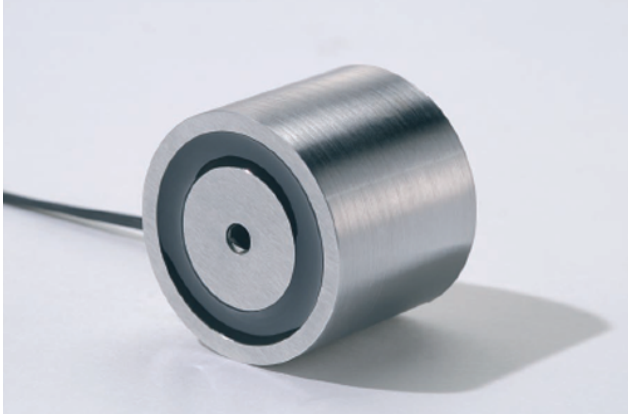

- ✓ Dimensions from 15 to 250 mm
- ✓ Holding force from 36 to 30.000 N
- ✓ Compact design
- ✓ Different holding systems

This series of circular electromagnets are preferably used in the handling industry and in the automation sector.

The coil is resin coated (protection class IP65 or IP54). The magnet housing and the outer surface are galvanized. Anchoring can be done via the central threaded hole on the back of the housing.

MODEL	DIMENSIONS (mm)		M x deep (mm)	Holding force (N)	Power (W)	Weight (kg)
	D	H				
015B011	15	12	3x6	36	2	0.02
018B001	18	11	3x5	45	1.4	0.02
025B001	25	20	4x6	140	3.1	0.06
032B001	32	22	4x6	230	3.5	0.1
040B001	40	25.5	5x8	475	5.1	0.2
050B001	50	27	5x8	750	6.2	0.3
063B001	63	30	8x12	1.000	7.9	0.6
070B001	70	35	8x12	1.500	12	0.9
080B001	80	38	8x12	1.800	14.9	1.2
090B001	90	42	8x12	2.400	14	1.7
100B001	100	43	10x15	3.400	20.6	2
150B001	150	56	16x24	9.000	37	6
180B001	180	63	24x36	15.000	49	10
250B001	250	80	24x36	30.000	90	26
Other models on request						