


Electromagnet series H

ELECTROMAGNETS

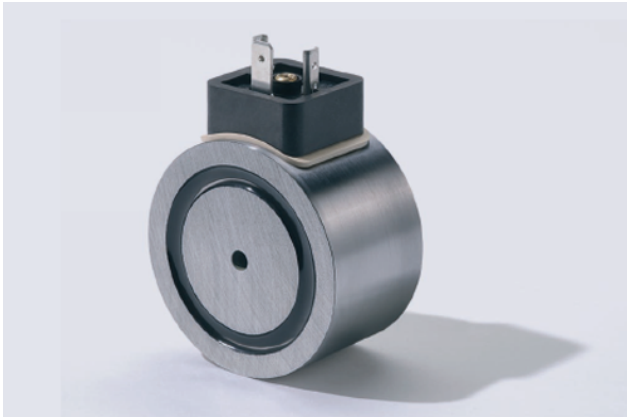

- ✓ Dimensions from 15 to 100 mm
- ✓ Holding force from 45 to 4.890 N
- ✓ Compact design
- ✓ Different holding systems

This series of circular electromagnets has a higher yield thanks to the size of the central pole. They are used in cases of machining in confined spaces.

The coil is resin coated (protection class IP65 or IP54). The magnet housing and the outer surface are galvanized. Anchoring can be done via the central threaded hole on the back of the housing.

MODEL	DIMENSIONS (mm)		M x deep (mm)	Holding force (N)	Power (W)	Weight (kg)
	D	H				
015H050	15	12	3x5	45	1,4	0,01
020H030	20	15	3x5	112	2,2	0,03
025H060	25	20	4x6	240	3,2	0,06
030H060	30	25	4x6	355	4,1	0,1
040H060	40	27	5x8	740	5,9	0,2
050H170	50	30	6x9	1.250	7,5	0,4
060H050	60	35	8x12	1.730	10,3	0,7
070H130	70	35	10x14	2.310	12,1	1
080H040	80	38	12x18	3.190	14,9	1,4
090H050	90	42	14x21	3.880	17,8	1,8
100H030	100	40	16x24	4.890	18,4	2.2
Other models on request						