


Permanent magnetic chucks RF

FOR MACHINING THIN PIECES AND RINGS


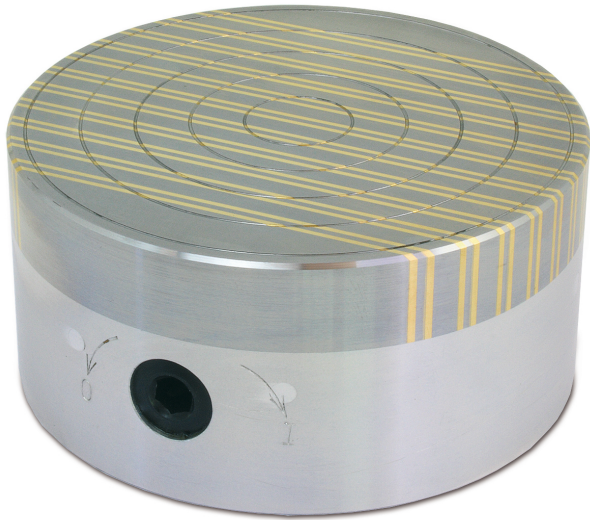


- ✓ Material: Ferrite Magnet, Alu.
- ✓ Polar pitch: 4/6 + 2 mm.
- ✓ Holding force: approx. 80 N/cm²
- ✓ Magnetic Flux Height approx. 4 mm

The circular magnetic planes of the RF type are used for turning and grinding thin details such as disks or rings.

Magnetic force is adjustable at different levels.

On the surface can be added an element for centering the workpiece.

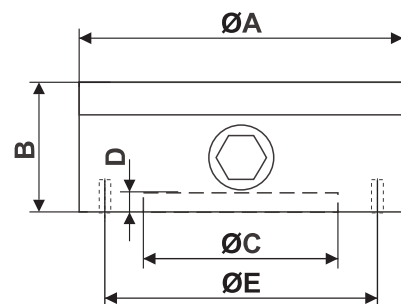

MODEL	DIMENSIONS (mm)					Holes	Poles	WEIGHT kg	V-Max u/Min
	A	B	C	D	E				
RF 10	100	62	70	2.5	91	3xM5	4+1.5+2+1.5	3	1500
RF 13	130	62	90	2.5	120	4xM6	4+1.5+2+1.5	5	1200
RF 16	160	75	125	3	142	4xM8	6+1.5+2+1.5	8	1000
RF 20	200	80	150	4.5	182	4xM8	6+1.5+2+1.5	13	800
RF 25	250	80	200	4.5	232	4xM8	6+1.5+2+1.5	20	700
RF 30	300	85	250	4.5	285	4xM8	6+1.5+2+1.5	27	700

Other model on request